


Universal Elevator Type 33E

Technical data


Applications:	Powder, granulates, pellets, grain & seeds
Execution:	Design: closed w/inspection doors / open construction Material: mild steel w/powder coating / stainless steel
Buckets:	Type: standard / FRB Size: 3,2 liters Material: PP / PP-Detectable / PP-Glass / PP-Glass-AS / PA
Chains:	Material: mild steel / stainless steel
Chain tension:	Automatic, pneumatically operated w/local control
Intermediate outlet(s):	Pneumatically operated (optional)
Inlet, feeding system:	Simatek Drum Feeder, type CBFS / Vibrating Feeder
Overload protection:	Electronic
Noise emission declaration:	Below 70 dB(A) at 1m distance, without product (Lpa re. 20μPa)

Capacity

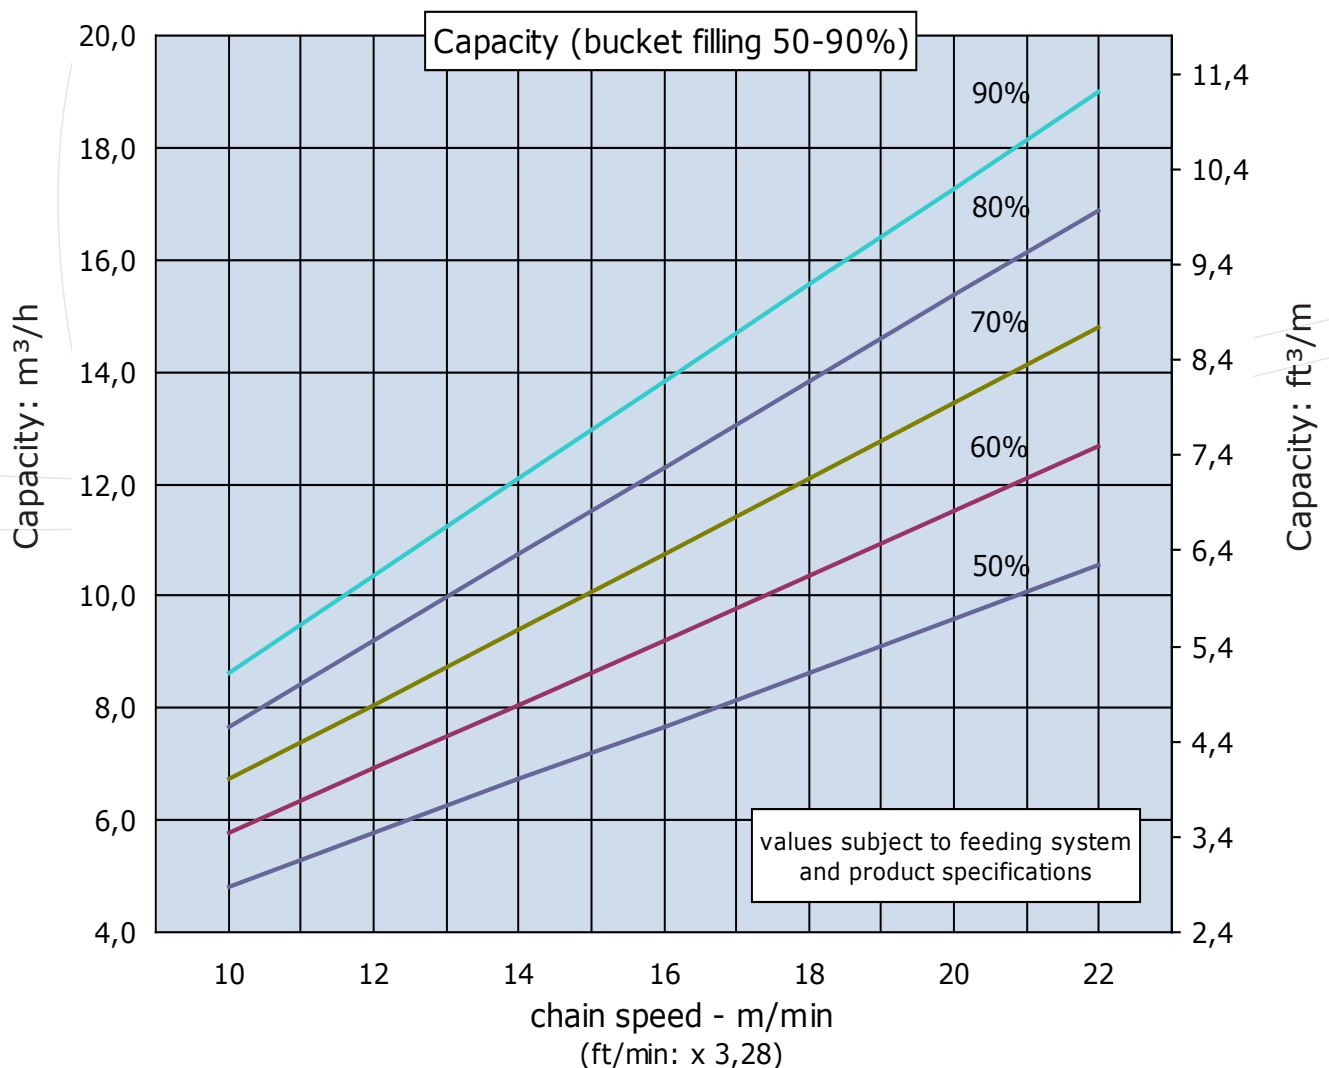


Universal Elevator Type 33E

Measurements

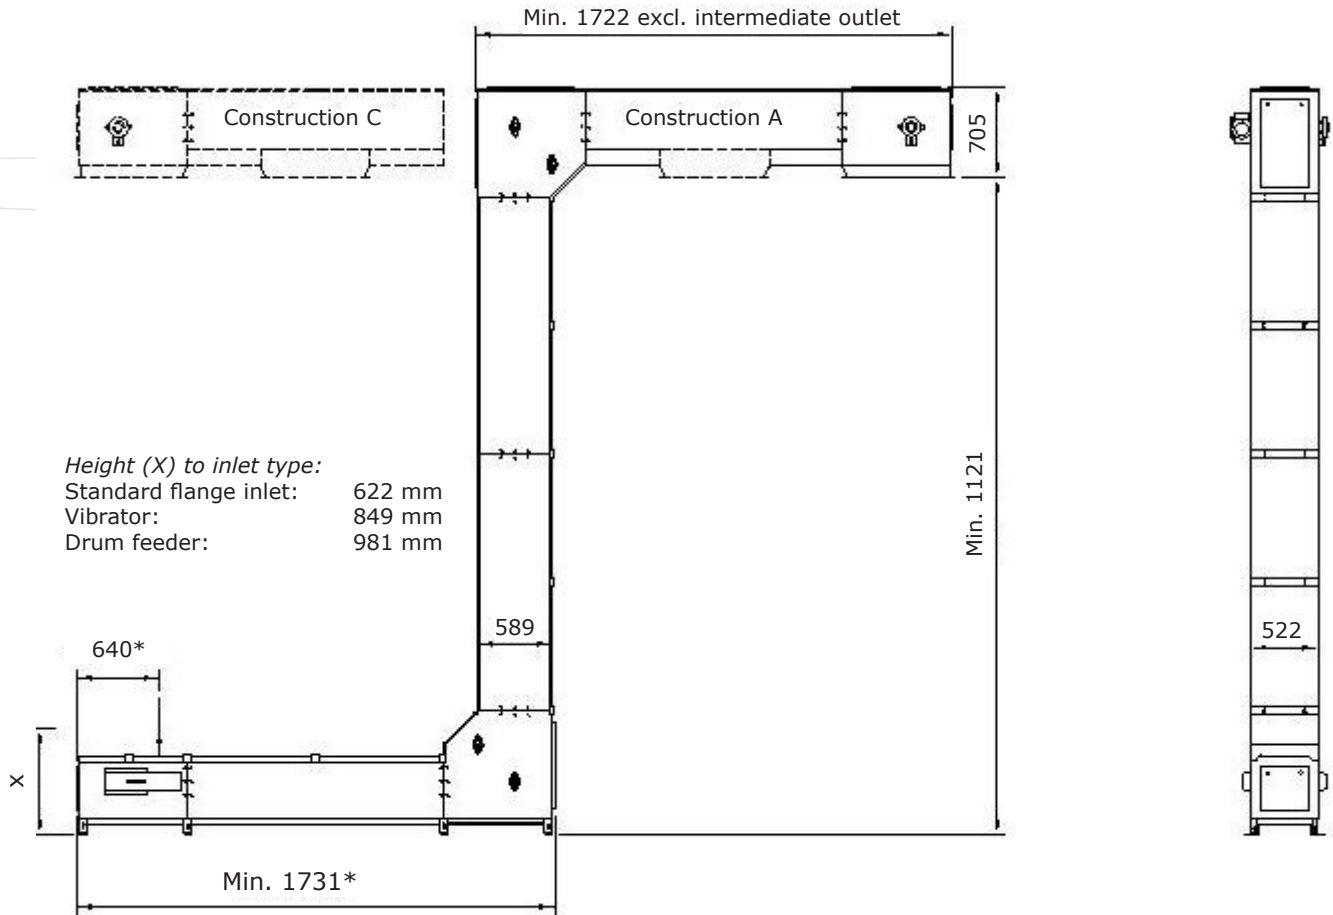

*) Depending on inlet type

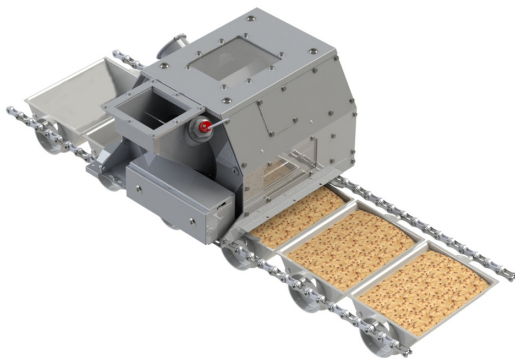

Drum feeder

CBFS (Continuous Batch Feeding System)
for most free flowing products.

Filling degree up to 95%



Vibrating feeder

Traditional gentle feeding system
for most product types.

Filling degree up to 65%

