


Universal Elevator Type 460E

Technical data



Applications:	Powders, granulates, pellets, grain & seeds
Execution:	Design: Closed w/inspection doors Material: mild steel w/powder coating / stainless steel
Buckets:	Type: FRB Size: 46 liters Material: Stainless steel (AISI 316) / Poly Carbonate (PC)
Chains:	Material: mild steel / stainless steel
Chain tension:	Automatic, pneumatically operated w/local control
Intermediate outlet(s):	Pneumatically operated (optional)
Inlet, feeding system:	Simatek Drum Feeder (optional)
Overload protection:	Electronic
Noise emission declaration:	Below 70 dB(A) at 1m distance, without product (Lpa re. 20μPa)

Capacity

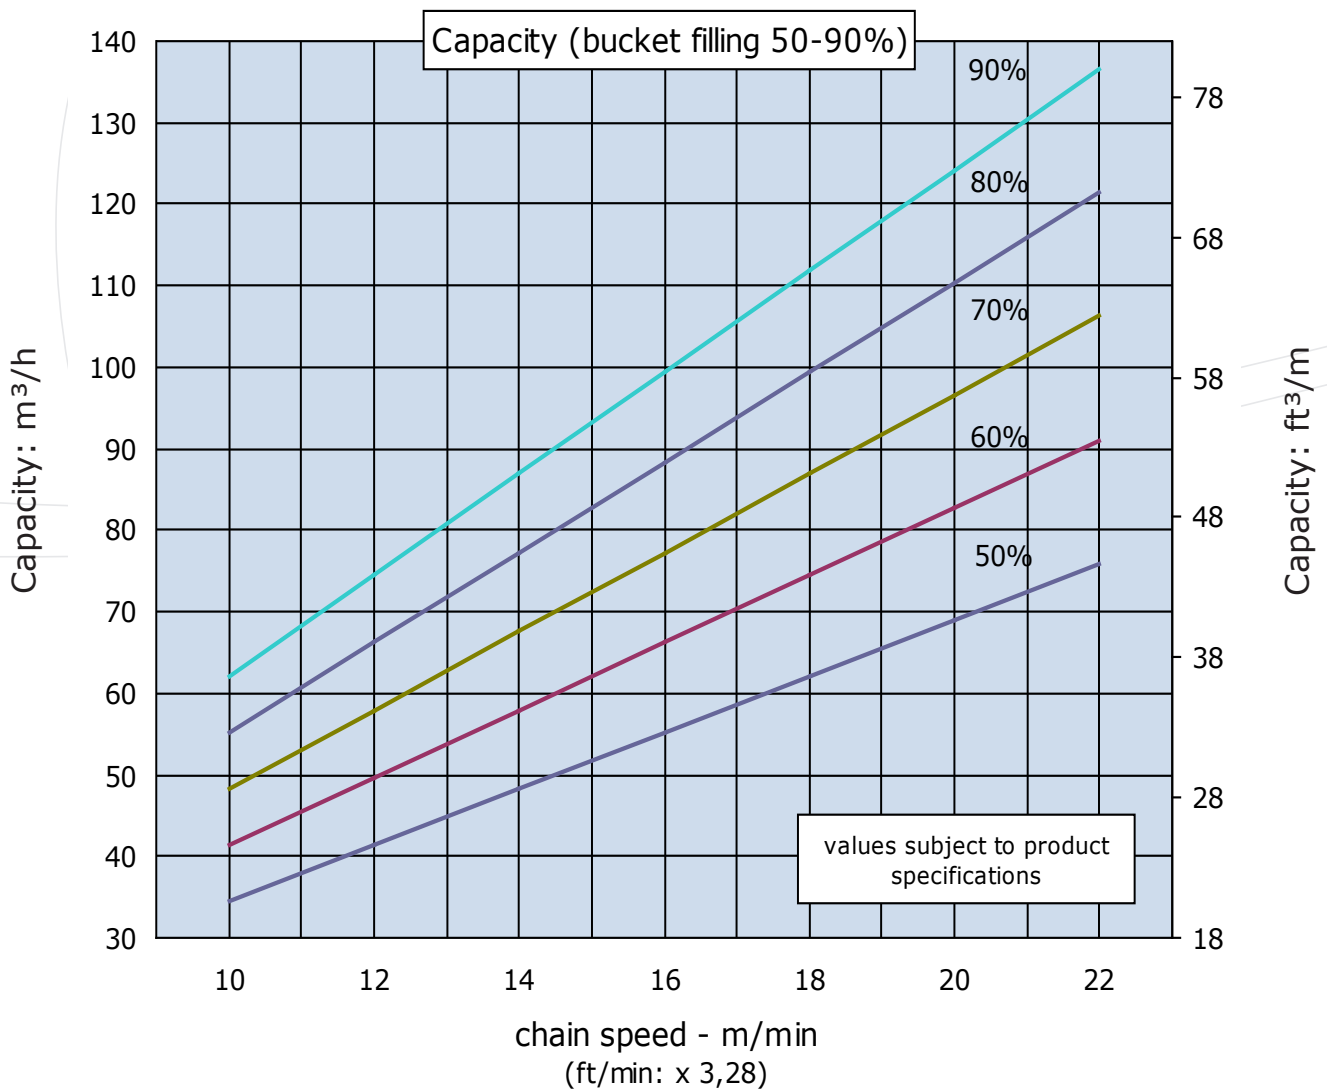

Universal Elevator 460E

Measurements

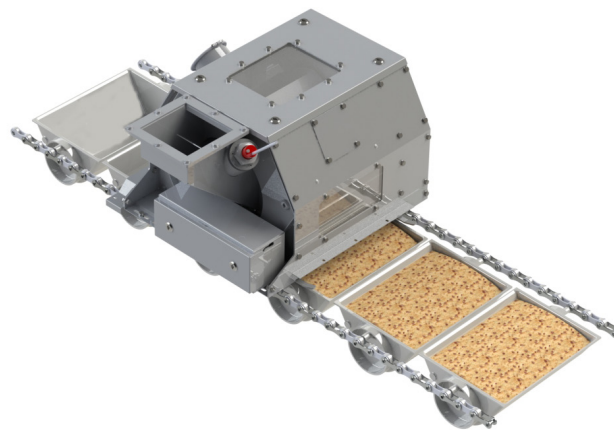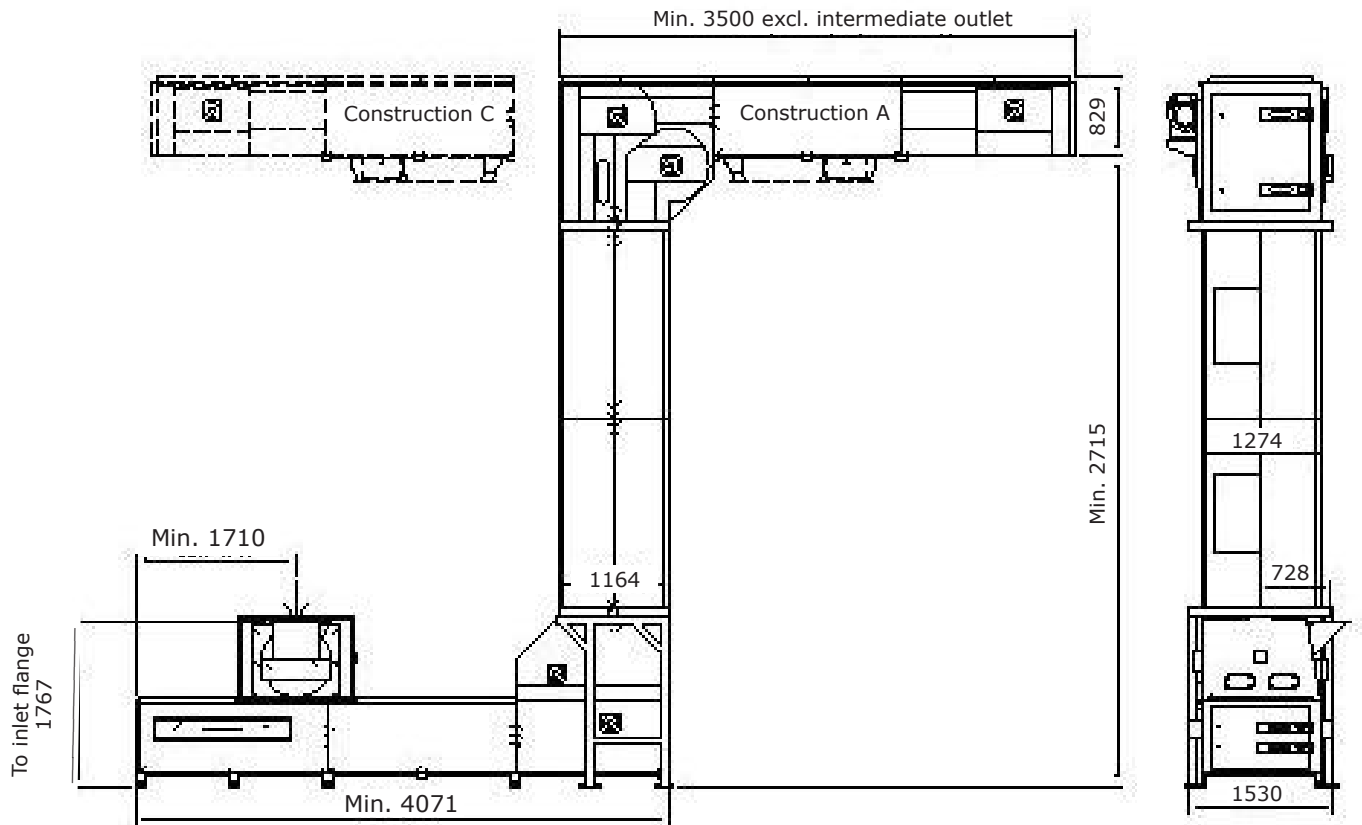

Drum feeder

CBFS (Continuous Batch Feeding System)
for most free flowing products.

Filling degree up to 95%

