


Universal Elevator Type 110E

Technical data


Applications:	Powder, granulates, pellets, grain & seeds
Execution:	Design: closed w/inspection doors / open construction Material: mild steel w/powder coating / stainless steel
Buckets:	Type: standard / FRB Size: 9,5 liters / 10 liters (AISI 316) Material: PP/PP-Detectable/PP-Glass/PP-Glass-AS/PA/AISI 316
Chains:	Material: mild steel / stainless steel
Chain tension:	Automatic, pneumatically operated w/local control
Intermediate outlet(s):	Pneumatically operated (optional)
Inlet, feeding system:	Simatek Drum Feeder, type CBFS / Vibrating Feeder
Overload protection:	Electronic
Noise emission declaration:	Below 70 dB(A) at 1m distance, without product (Lpa re. 20μPa)

Capacity

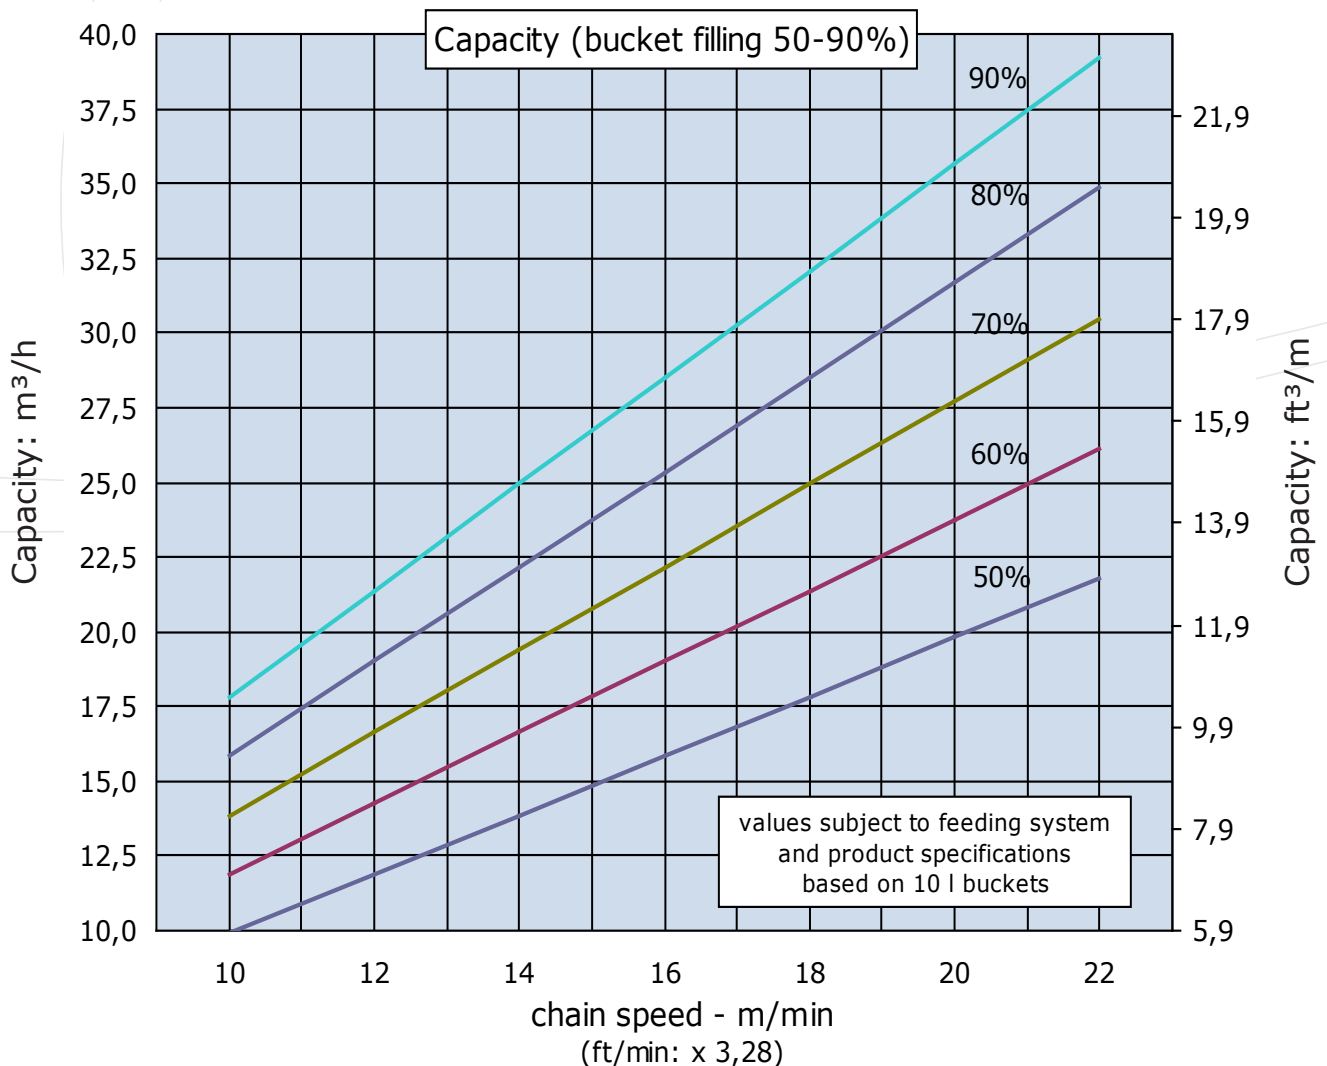


Universal Elevator Type 110E

Measurements

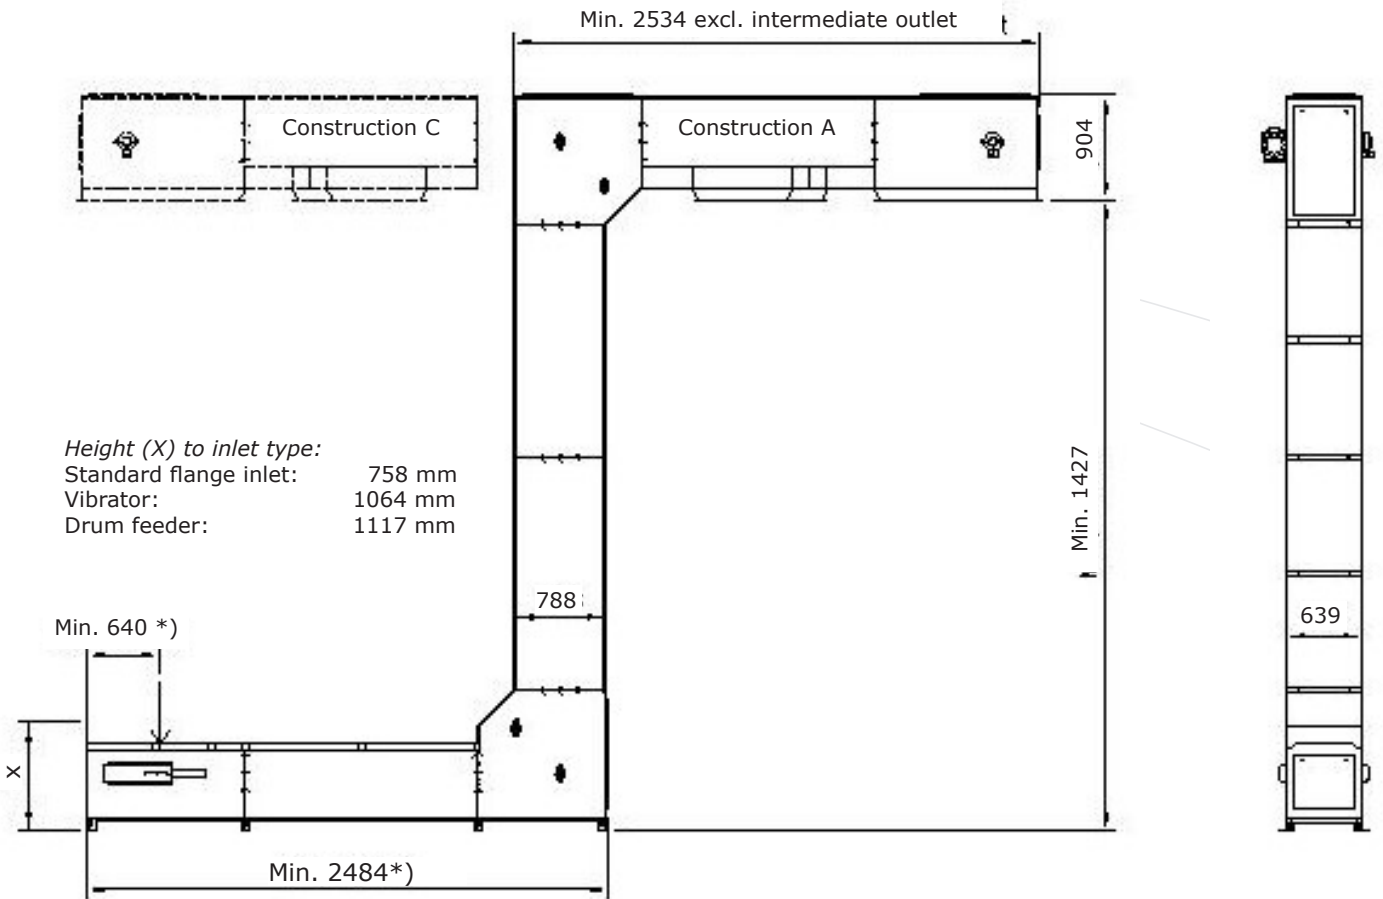

*) Depending on inlet type

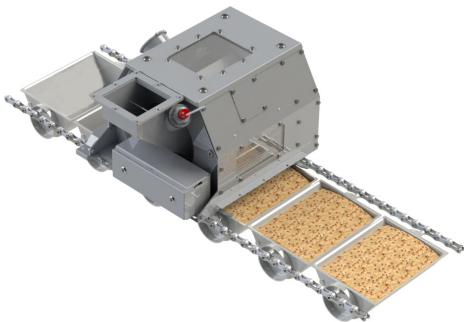

Drum feeder
CBFS (Continuous Batch Feeding System)
 for most free flowing products.
 Filling degree up to 95%



Vibrating feeder
 Traditional gentle feeding system
 for most product types.
 Filling degree up to 65%

