


# Universal Elevator Type 200E

## Technical data


Applications:	Powder, granulates, pellets, grain & seeds
Execution:	Design: closed w/inspection doors / open construction Material: mild steel w/powder coating / stainless steel
Buckets:	Type: standard / FRB Size: 18,5 liters / 20,5 liters (AISI 316) Material: PP-Glass / PP-Glass-AS / PE-EL / PC / AISI 316
Chains:	Material: mild steel / stainless steel
Chain tension:	Automatic, pneumatically operated w/local control
Intermediate outlet(s):	Pneumatically operated (optional)
Inlet, feeding system:	Simatek Drum Feeder, type CBFS / Vibrating Feeder
Overload protection:	Electronic
Noise emission declaration:	Below 70 dB(A) at 1m distance, without product (Lpa re. 20 $\mu$ Pa)

## Capacity

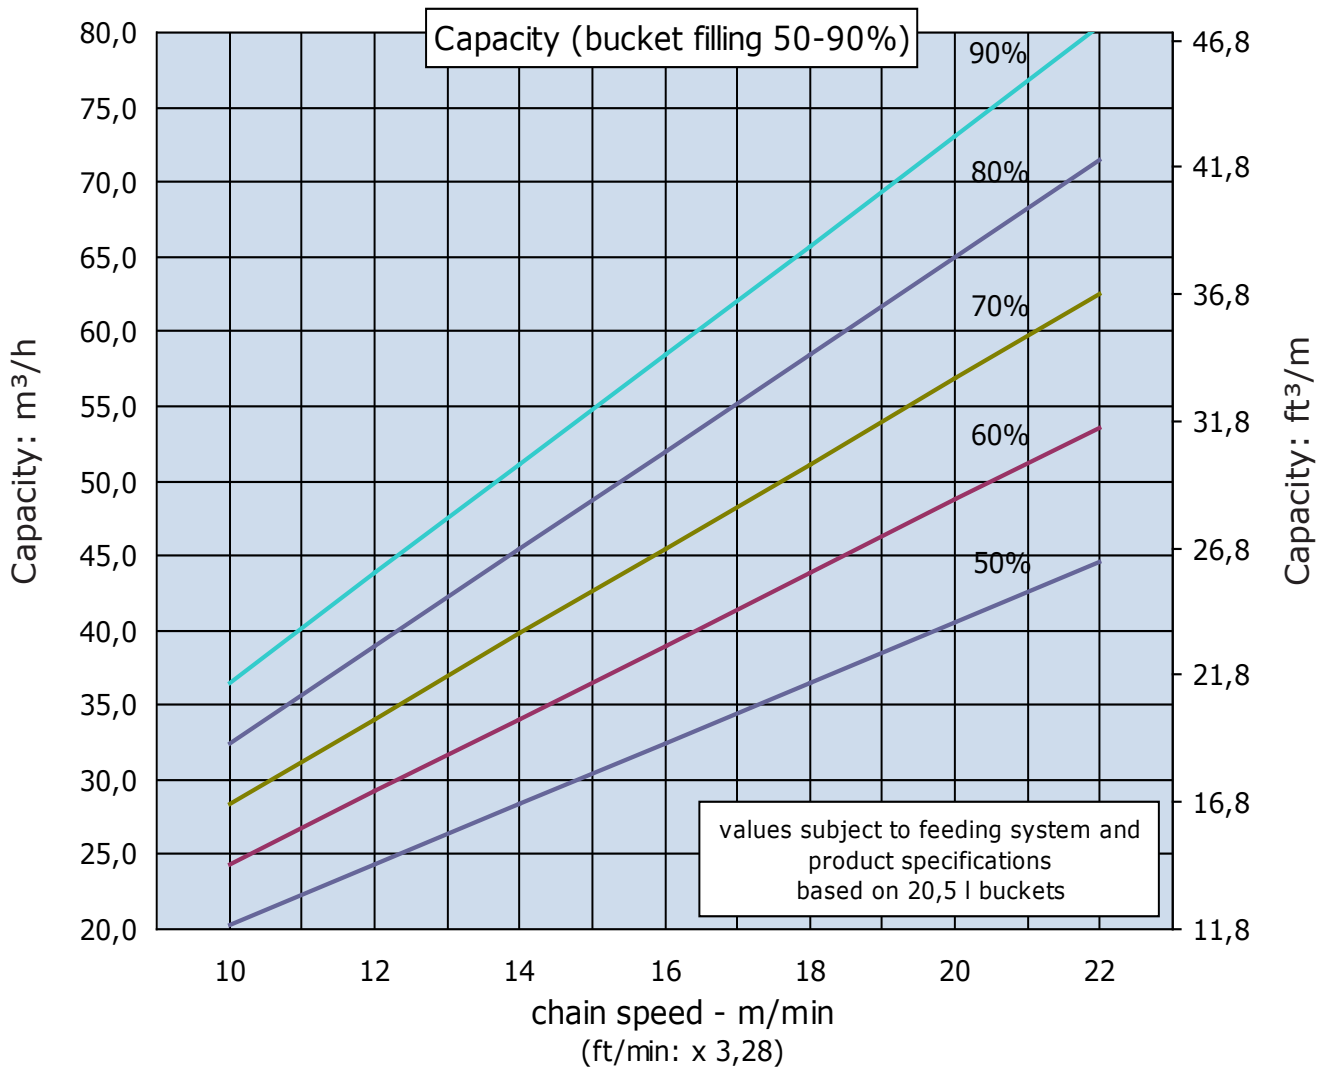


# Universal Elevator Type 200E

## Measurements

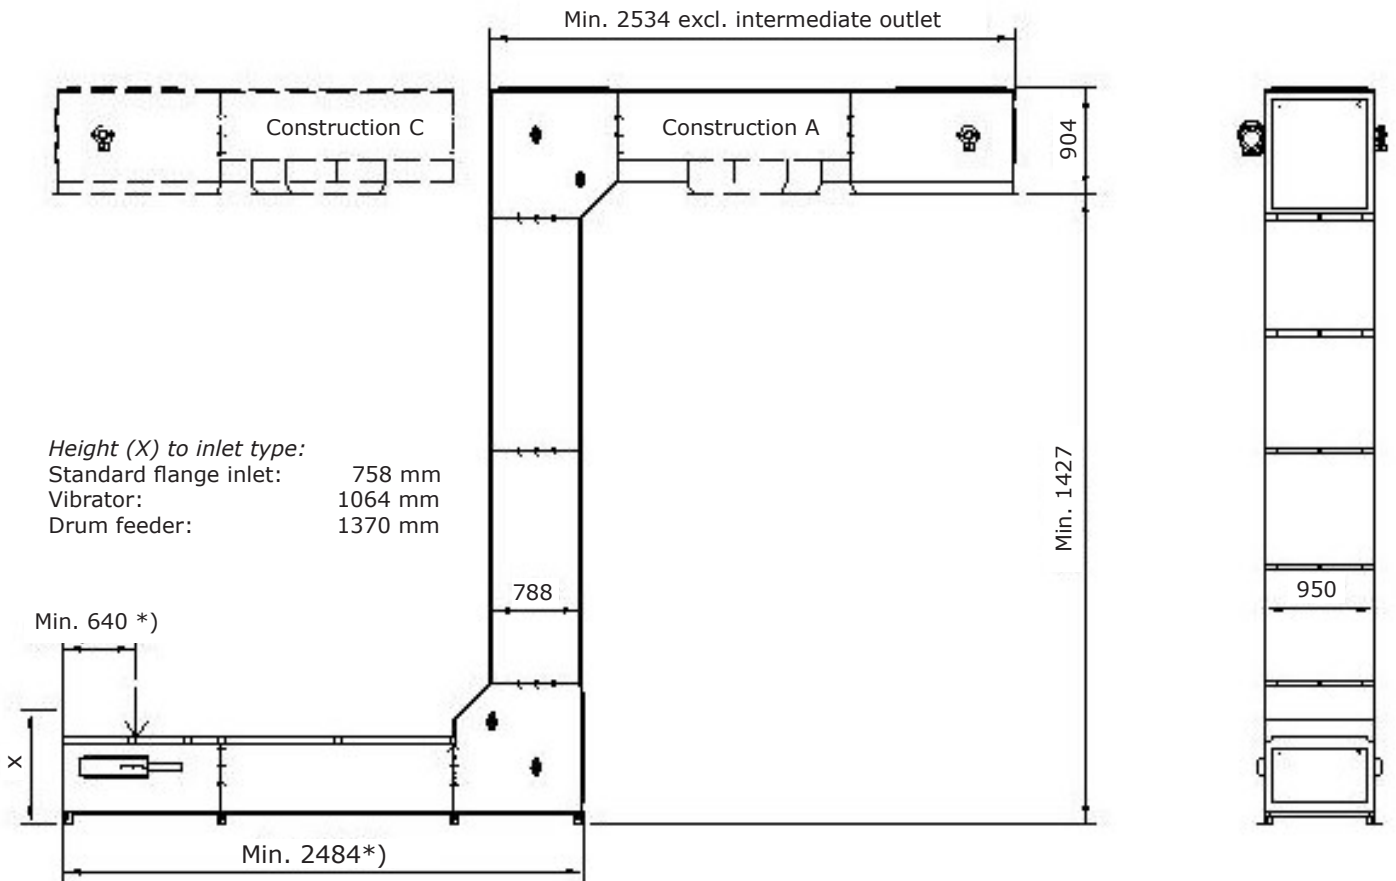

\*) Depending on inlet type

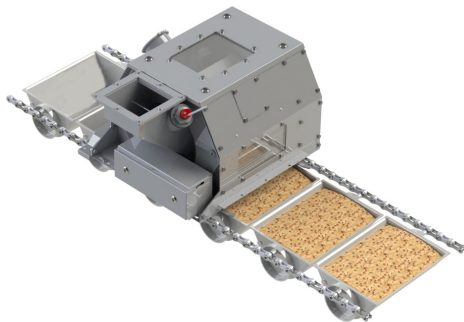

Drum feeder

**CBFS** (Continuous Batch Feeding System)  
for most free flowing products.

Filling degree up to 95%



Vibrating feeder

Traditional gentle feeding system  
for most product types.

Filling degree up to 65%

