


Universal Elevator Type 44E

Technical data


| | |
|-----------------------------|--|
| Applications: | Powder, granulates, pellets, grain & seeds |
| Execution: | Design: closed w/inspection doors / open construction Material: mild steel w/powder coating / stainless steel |
| Buckets: | Type: standard / FRB Size: 4,4 liters Material: PP-Glass-AS |
| Chains: | Material: mild steel / stainless steel |
| Chain tension: | Automatic, pneumatically operated w/local control |
| Intermediate outlet(s): | Pneumatically operated (optional) |
| Inlet, feeding system: | Simatek Drum Feeder, type CBFS / Vibrating Feeder |
| Overload protection: | Electronic |
| Noise emission declaration: | Below 70 dB(A) at 1m distance, without product (Lpa re. 20μPa) |

Capacity

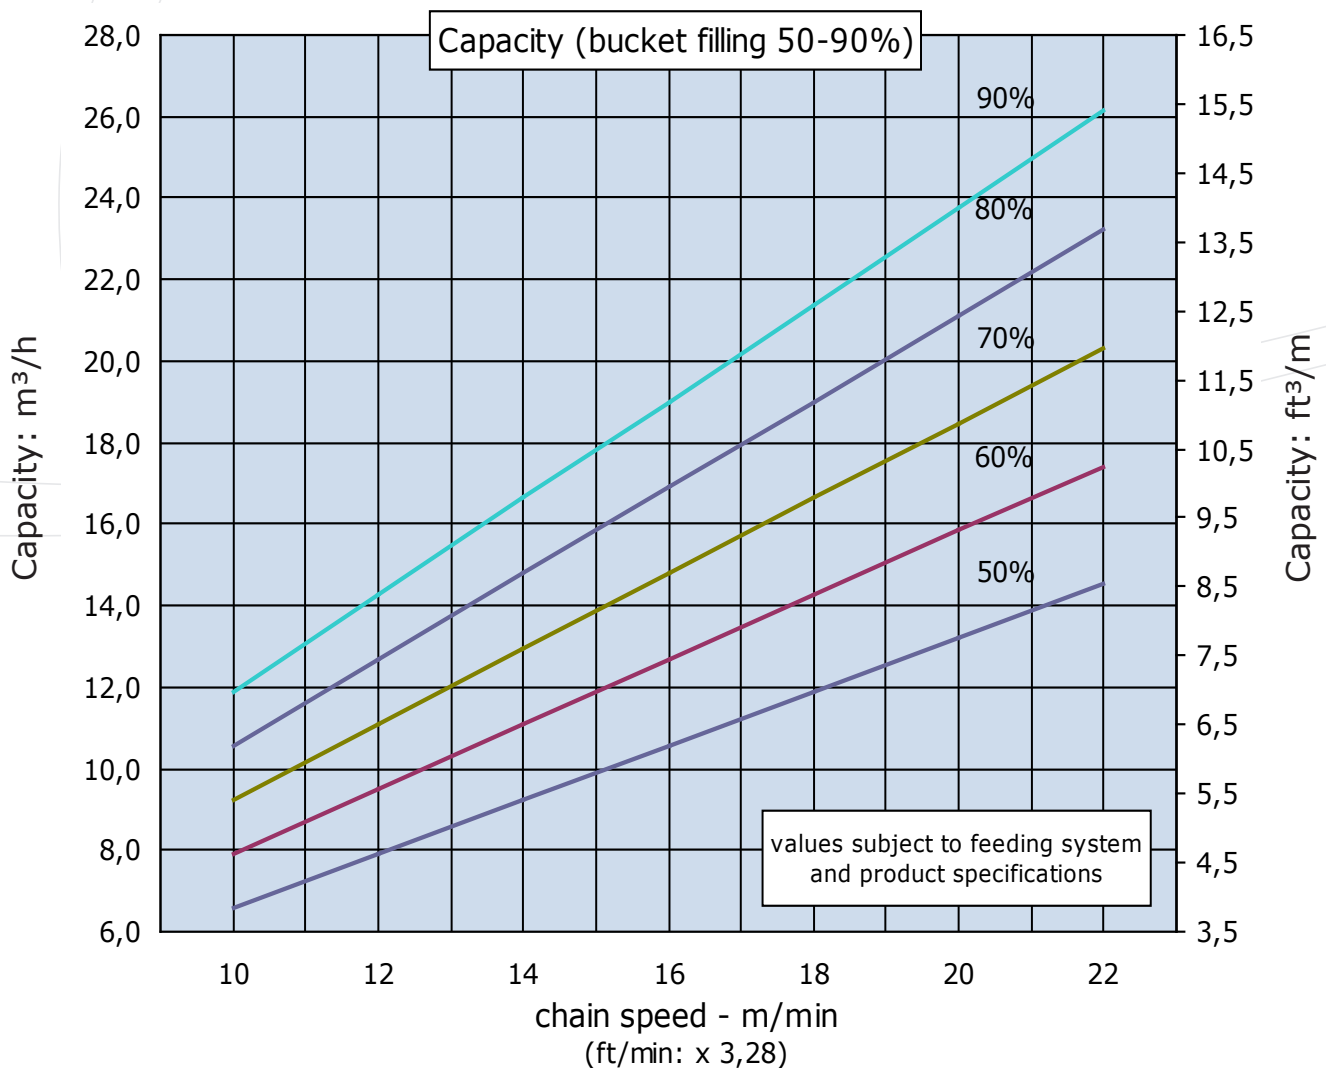


Universal Elevator Type 44E

Measurements

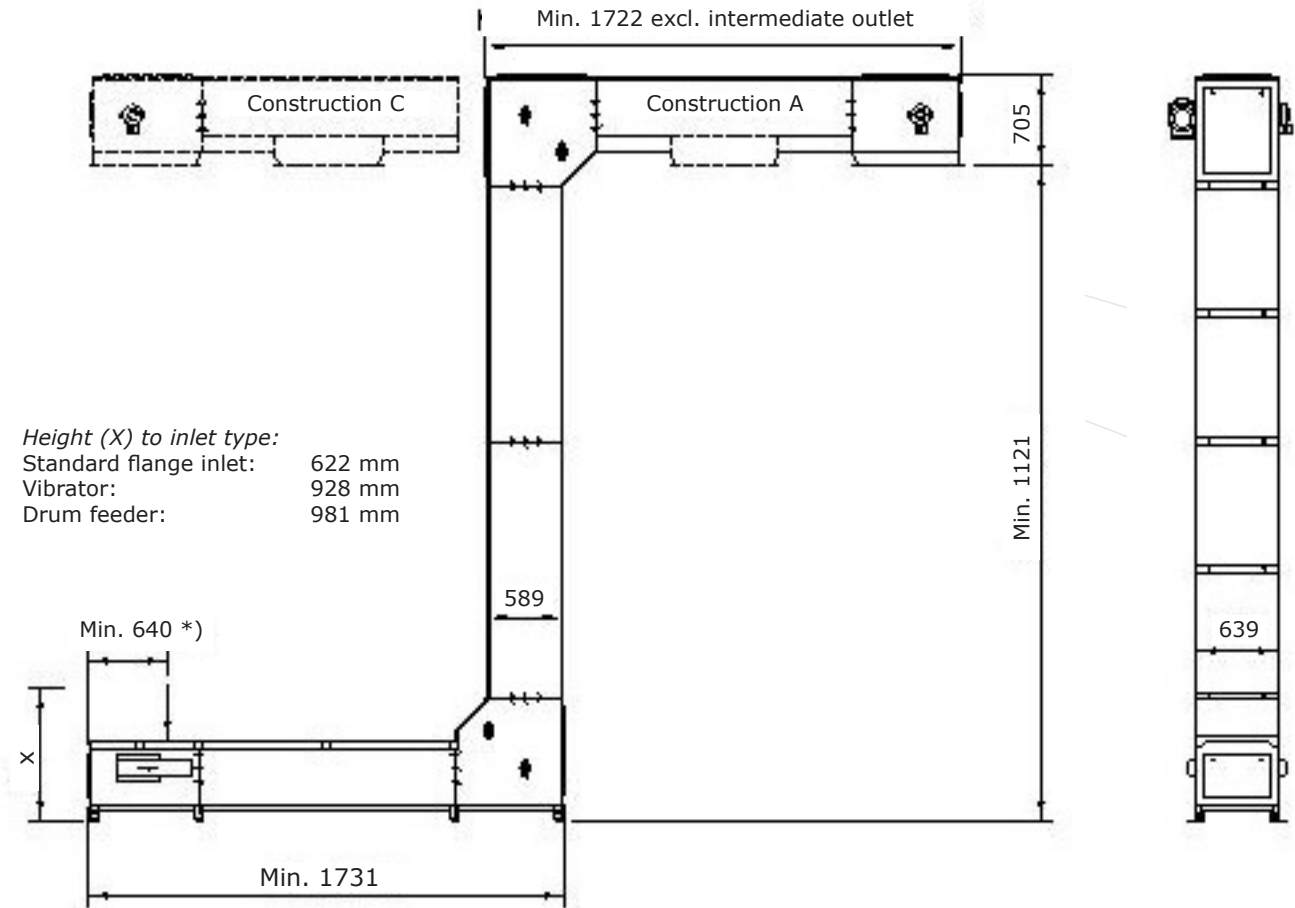

*) Depending on inlet type

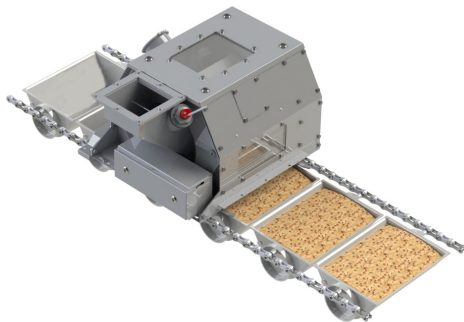

Drum feeder

CBFS (Continuous Batch Feeding System)
 for most free flowing products.
 Filling degree up to 95%



Vibrating feeder

Traditional gentle feeding system
 for most product types.
 Filling degree up to 65%

